



# CALYX

## Embedded Cellular Raspberry Pi HAT+



Industrial & automation



Energy & utilities



Smart city



Enterprise



Retail

### OPTIMAL FORM FACTOR

Mount seamlessly on Raspberry Pi 4/5

### GPIO MODEM CONTROL

Wake, reset, and manage the modem via Pi pins

### PCM ENHANCED AUDIO

Enable clean, low-latency audio transfer

### VERSATILE CONNECTIVITY

Choose the right option: 4G Cat 4, 5G Redcap, or full-fledge 5G

**Mobile**


---

**Calyx 4G / EBD021**

Mobile module	4G LTE-FDD (Cat 4) – 75Mbps DL, 50Mbps UL; LTE-TDD (Cat 4) – 65Mbps DL, 35Mbps UL; DC-HSPA+ – 42Mbps DL, 5.76Mbps UL; 3G – 384 kbps DL, 384 kbps UL, 2G EDGE – 236.8 kbps DL, 236.8 kbps UL, 2G GPRS – 85.6 kbps DL, 85.6 kbps UL
---------------	---

3GPP Release	Release 9
--------------	-----------

---

**Calyx 5G / EBD050**

Mobile module	5G Sub-6Ghz SA/NSA 2.4/3.4Gbps DL (4x4 MIMO), 900/550 Mbps UL (2x2); 4G LTE Cat 19 up to 1.6 Gbps DL/ 200 Mbps UL; 3G up to 42 DL/ 5.76 UL Mbps
---------------	---

3GPP Release	Release 16
--------------	------------

---

**Calyx 5G Red Cap / EBD070**

Mobile module	5G Sub-6Ghz SA 223 Mbps DL/123 Mbps UL; 4G LTE (Cat 4) up to 195 Mbps DL/105 Mbps UL
---------------	--

3GPP Release	Release 17
--------------	------------

**40-pin GPIO header**

PWR_KEY	Modem turn on/off. Digital Input, 0 - 3.3 V logic level, active High, to activate use pulse (≥500 ms)
---------	---

Modem wakeup	Wake up modem from a sleep mode. Digital Input, 0 - 3.3 V logic level, active Low
--------------	---

Modem reset	Resets the modem. Digital Input, 0 - 3.3 V logic level, active High
-------------	---

PCM	Digital Interface, 0 - 3.3 V logic level
-----	--

SIM_SELECT	Used to select between SIM. Digital Input, 0 - 3.3 V logic level, SIM is selected by default, but with high logic level can be switched to eSIM.
------------	--

**Power**

USB type C	5 VDC
------------	-------

40-pin GPIO header	On a 40-pin header, 5 VDC and 3.3 VDC
--------------------	---------------------------------------

### Physical Interfaces

Status LEDs	1 x Power, NET IND, NET STAT
SIM	1 x SIM slot (Nano SIM - 4FF), push-pull
Power	On a 40-pin header/USB power

#### **Calyx 4G / EBD021; Calyx 5G Red Cap / EBD070**

Antennas	2 x SMA for Mobile
USB	USB 2.0, type C receptacle

#### **Calyx 5G / EBD050**

Antennas	4 x SMA for Mobile
USB	USB 3.0, type C receptacle

### Physical Specification

Weight	57 g
Mounting options	With included mounting kit

#### **Calyx 4G / EBD021; Calyx 5G Red Cap / EBD070**

Dimensions (W x H x D)	56 x 23.11 x 95.48 mm
------------------------	-----------------------

#### **Calyx 5G / EBD050**

Dimensions (W x H x D)	56 x 23.11 x 100.8 mm
------------------------	-----------------------

### Operating Environment

Operating temperature	-40 °C to 75 °C
-----------------------	-----------------

### Regulatory & Type Approvals

#### **Calyx 4G / EBD021; Calyx 5G / EBD050**

Regulatory	CE, UKCA, EAC, UCRF, RCM, CB, WEEE
------------	------------------------------------

#### **Calyx 5G Red Cap / EBD070**

Regulatory	CE, UKCA, EAC, UCRF, FCC, ISED (IC), RCM, CB, WEEE
------------	--

**EMC Emissions & Immunity**

**Calyx 4G / EBD021**

Standards

EN 55032:2015+ A11:2020 + A1:2020  
 EN 55035:2017+A11:2020  
 EN 61000-3-3:2013+A1:2019+A2:2021  
 EN IEC 61000-3-2:2019+A1:2021+A2:2024  
 EN 301 489-1 V2.2.3  
 EN 301 489-17 V3.3.1  
 EN 301 489-52 V1.2.1

**Calyx 5G / EBD050**

Standards

EN 55032:2015+ A11:2020 + A1:2020  
 EN 55035:2017+A11:2020  
 EN 61000-3-3:2013+A1:2019+A2:2021  
 EN IEC 61000-3-2:2019+A1:2021+A2:2024  
 EN 301 489-1 V2.2.3  
 EN 301 489-3 V2.3.2  
 EN 301 489-17 V3.3.1  
 EN 301 489-19 V2.2.1  
 EN 301 489-52 V1.2.1

**Calyx 5G Red Cap / EBD070**

Standards

EN 55032:2015+ A11:2020 + A1:2020  
 EN 55035:2017+A11:2020  
 EN 61000-3-3:2013+A1:2019+A2:2021  
 EN IEC 61000-3-2:2019+A1:2021+A2:2024  
 EN 301 489-1 V2.2.3  
 EN 301 489-17 V3.3.1  
 EN 301 489-19 V2.2.1  
 EN 301 489-52 V1.2.1  
 47 CFR Part 15, Subpart B

**RF**

**Calyx 4G / EBD021; Calyx 5G / EBD050**

Standards

EN 301 908-1 V15.2.1  
 EN 301 908-2 V13.1.1  
 EN 301 908-13 V13.2.1  
 EN 301 908-25 V15.1.1

**Calyx 5G Red Cap / EBD070**

Standards

EN 301 908-1 V15.2.1  
 EN 301 908-13 V13.2.1  
 EN 301 908-25 V15.1.1


**Safety**

Standards


**CE:** EN IEC 62311:2020  
**RCM:** AS/NZS 62368.1:2022  
**CB:** EN IEC 62368-1:2020+A11:2020

## EBD021 & EBD070 Hardware

### TOP VIEW

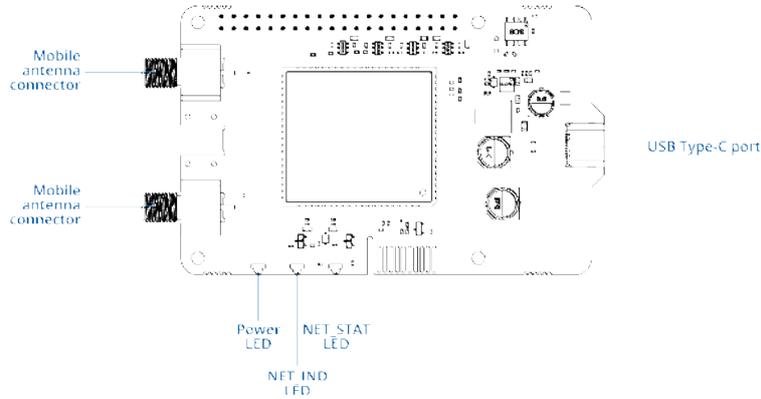

### LEFT VIEW

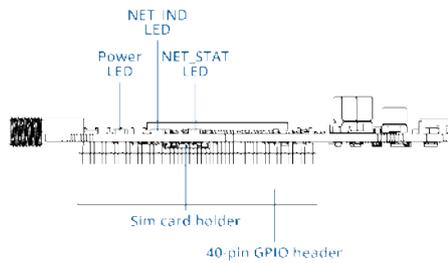

## GPIO Connector Pinout

### TOP VIEW

+3.3 V	1	2	+5.0 V
NC	3	4	+5.0 V
NC	5	6	GND
NC	7	8	NC
GND	9	10	NC
PWR_KEY*	11	12	PCM_CLK
MODEM_RST*	13	14	GND
USB_BOOT*	15	16	PWR_KEY
+3.3 V	17	18	USB_BOOT
NC	19	20	GND
NC	21	22	MODEM_RST
NC	23	24	NC
GND	25	26	NC
EEPROM I2C_SDA	27	28	EEPROM I2C_SCL
SIM_SEL***	29	30	GND
SIM_SEL**	31	32	NC
NC	33	34	GND
PCM_SYNC	35	36	MODEM_WAKEUP
SLAVE/MASTER_SEL	37	38	PCM_DOUT
GND	39	40	PCM_DIN

NC - Not Connected


\* Alternative pin (with a different assembly)

\*\* Only in EBD021 with eSIM variant


\*\*\* Alternative pin (with a different assembly), only in EBD021 with eSIM variant

## EBD050 Hardware

### TOP VIEW

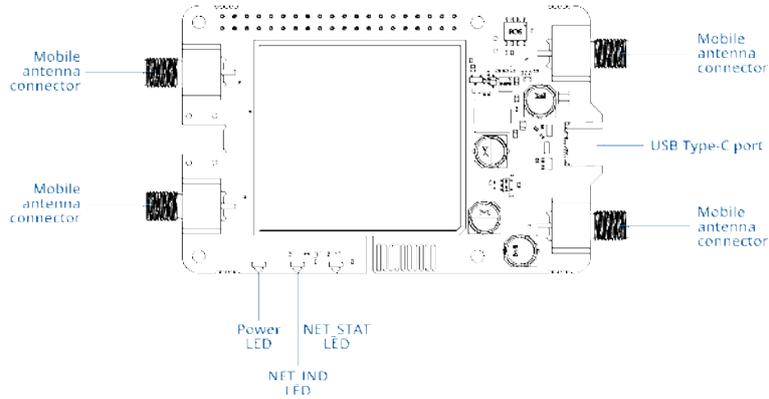


### LEFT VIEW

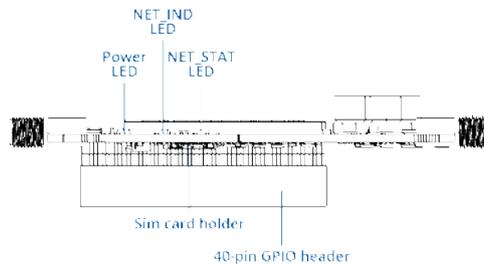

## GPIO Connector Pinout

### TOP VIEW

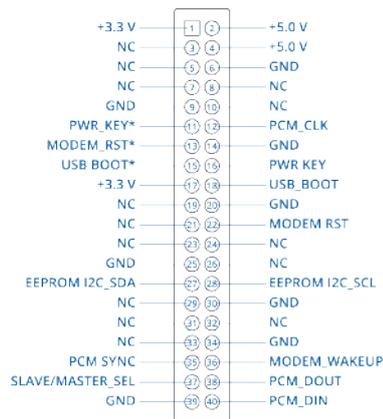

NC - Not Connected  
 \* Alternative pin (with a different assembly)

## Ordering


### Standard package\*



CALYX



QUICK START GUIDE



PCB CONNECTOR



USB TYPE-C TO  
USB TYPE-A ACCESSORY



FASTENERS KIT

\*Standard package contents may differ based on standard order codes.

For more information on all available packaging options – please [contact us](#) directly.

## Classification codes

**HS Code:** 851762

**HTS:** 8517.62.00

### Available versions

EBD021 0***** EMEA <sup>1</sup> , Thailand, Australia, New Zealand	<b>4G (LTE-FDD):</b> B1, B3, B5, B7, B8, B20, B28 <b>4G (LTE-TDD):</b> B38, B40, B41 <b>3G:</b> B1, B8 <b>2G:</b> B3, B8	EBD021000000 / Standard package without PSU
---	---	--

### Calyx 4G / EBD021

EBD050 0***** EMEA <sup>1</sup> , APAC, Brazil	<b>5G NR(SA/NSA):</b> n1, n3, n5, n7, n8, n20, n28, n38, n40, n41, n71, n75, n76, n77, n78 <b>4G (LTE-FDD):</b> B1, B3, B5, B7, B8, B20, B28, B32, B71 <b>4G (LTE-TDD):</b> B38, B40, B41, B42, B43 <b>3G:</b> B1, B5, B8	EBD050000000 / Standard package without PSU
--	--	--

### Calyx 5G / EBD050

EBD050 1***** North America	<b>5G NR NSA:</b> n2, n5, n7, n12, n13, n14, n25, n26, n29, n30, n38, n41, n48, n66, n70, n71, n77, n78 <b>5G NR SA:</b> n2, n5, n7, n12, n13, n14, n25, n26, n29, n30, n38, n41, n48, n66, n70, n71, n77, n78 <b>4G (LTE-FDD):</b> B2, B4, B5, B7, B12, B13, B14, B17, B25, B26, B29, B30, B66, B71 <b>4G (LTE-TDD):</b> B38, B41, B42, B43, B48	EBD050100000 / Standard package without PSU
--------------------------------	---	--

### Calyx 5G / EBD050

EBD070 0***** Global <sup>1</sup>	<b>5G NR SA:</b> n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n30, n38, n40, n41, n48, n66, n70, n71, n77, n78, n79 <b>4G (LTE-FDD):</b> B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B30, B66, B70, B71 <b>4G (LTE-TDD):</b> B34, B38, B39, B40, B41, B42, B43, B48	EBD070000000 / Standard package without PSU
--------------------------------------	---	--

### Calyx 5G Red Cap /

### EBD070

## Calyx spatial measurements

### Available versions

EBD021 EBD070 device measurements	56 x 23.11 x 95.48 mm
--------------------------------------	-----------------------


EBD050 device measurements	56 x 23.11 x 108 mm
-------------------------------	---------------------

Box (W x H x D):	102 x 31 x 102 mm
------------------	-------------------

## EBD021 & EBD070

### TOP VIEW

The figure below depicts the measurements of device and its components as seen from the top:

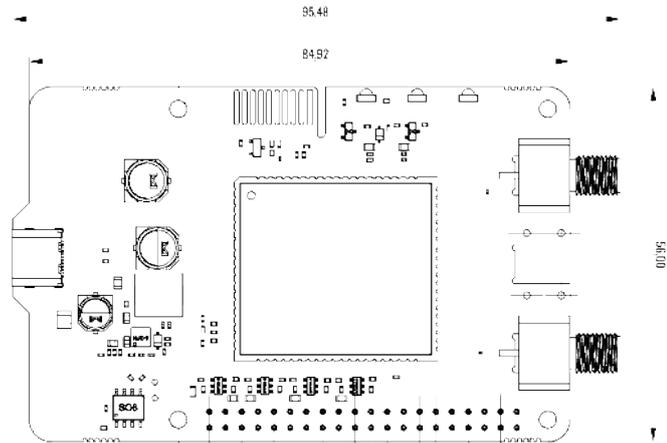


### LEFT VIEW

The figure below depicts the measurements of device and its components as seen from the left side:




### FRONT VIEW

The figure below depicts the measurements of device and its components as seen from the front side:

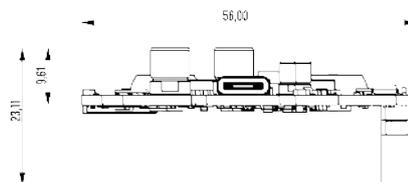


### REAR VIEW

The figure below depicts the measurements of device and its components as seen from the rear side:

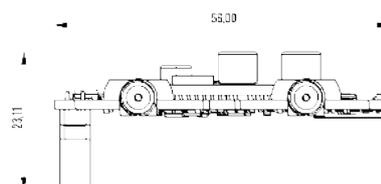

### MOUNTING SPACE REQUIREMENTS


The figure below depicts an approximation of the device's dimensions when cables and antennas are attached:

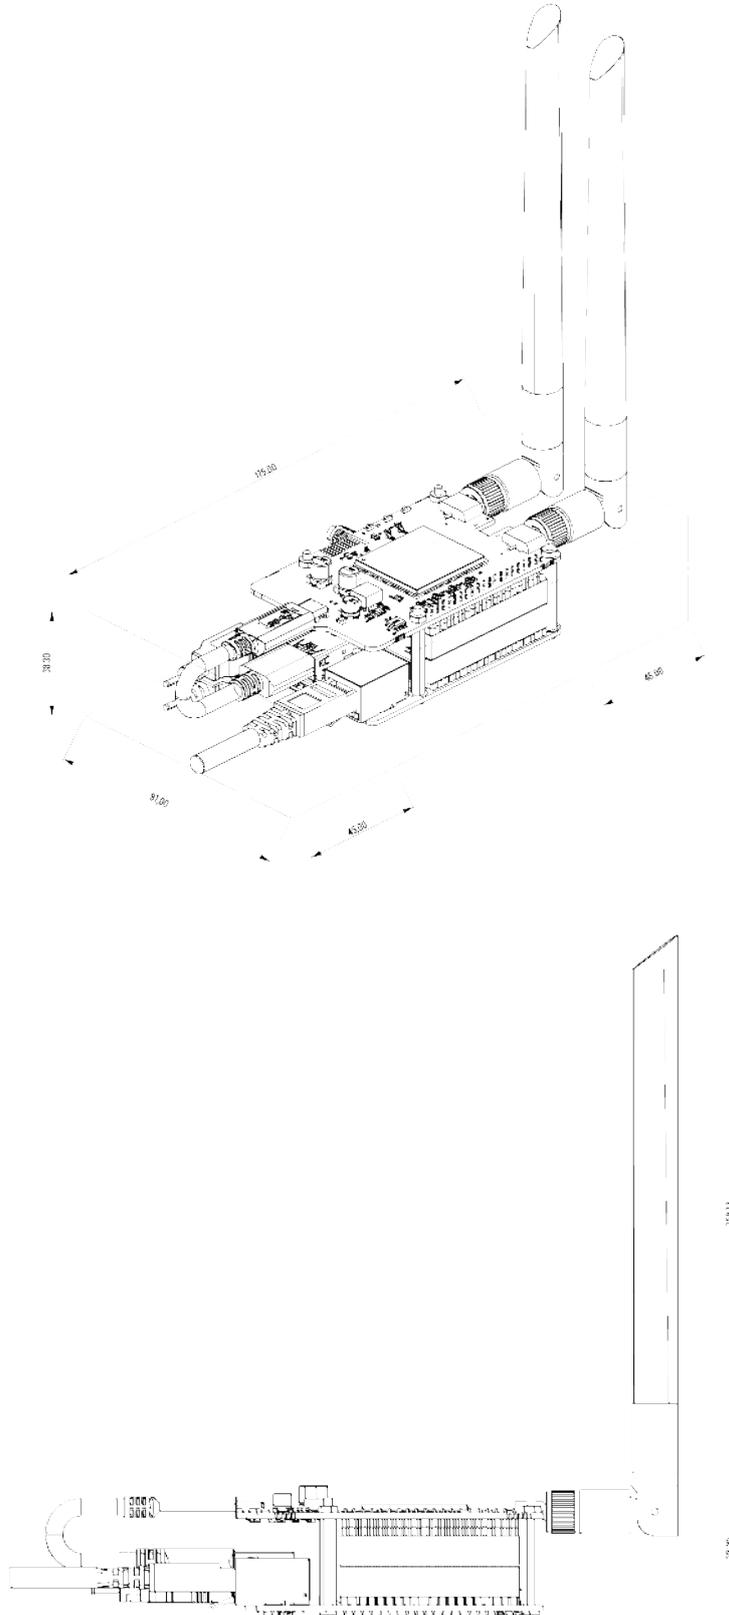

## EBD050


### TOP VIEW

The figure below depicts the measurements of device and its components as seen from the top:

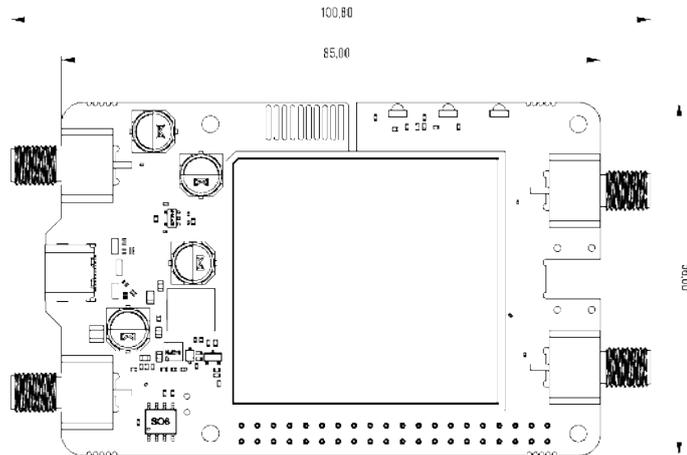


### LEFT VIEW

The figure below depicts the measurements of device and its components as seen from the left side:

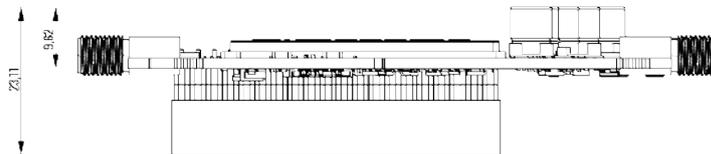


### FRONT VIEW

The figure below depicts the measurements of device and its components as seen from the front side:

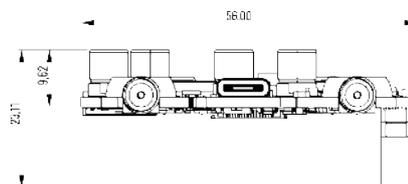

### REAR VIEW

The figure below depicts the measurements of device and its components as seen from the rear side:

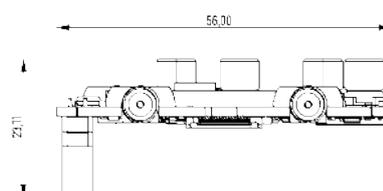

### MOUNTING SPACE REQUIREMENTS

The figure below depicts an approximation of the device's dimensions when cables and antennas are attached:

